


INSTAFLEX Weld-in saddle PB

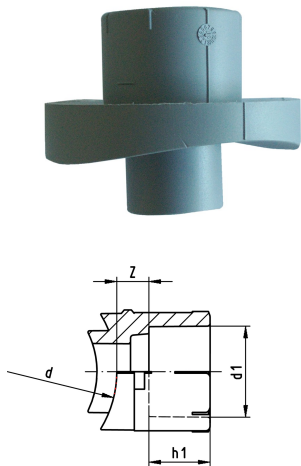

d - d1 (mm)	Code	SP	Weight (kg)	h1 (mm)	z (mm)
125 - 32	761 068 018	5	0.035	20	16
125 - 40	761 068 019	5	0.056	22	16
125 - 50	761 068 020	5	0.072	25	16
160 - 32	761 068 021	5	0.045	20	16
160 - 40	761 068 022	5	0.061	22	16
160 - 50	761 068 023	5	0.077	25	16
225 - 32	761 068 024	5	0.076	20	16
225 - 40	761 068 025	5	0.076	22	16
225 - 50	761 068 026	5	0.092	25	16

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>