


Rubber sealed branch saddle PVC-U
d63-225mm / Outlet with solvent cement socket

- 1 bar Gas / 10 bar Water
- NBR sealing
- Not according to German KTW-BWGL

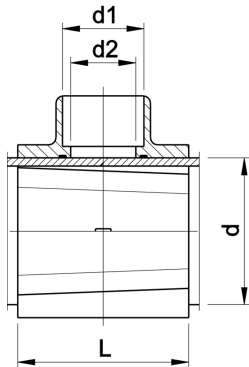

d	DN	PN	Code	Weight	d1	d2	L
(mm)	(mm)	(bar)		(kg)	(mm)	(mm)	(mm)
63	50	10	161 111 035	0.697	40	22	105
63	50	10	161 111 036	0.733	50	22	105
75	65	10	161 111 046	0.778	50	31	105
90	80	10	161 111 055	0.829	40	31	105
90	80	10	161 111 056	0.867	50	31	105
110	100	10	161 111 065	0.935	40	31	105
110	100	10	161 111 066	0.970	50	40	105
110	100	10	161 111 067	1.003	63	40	105
160	150	10	161 111 095	1.252	40	31	120
160	150	10	161 111 096	1.281	50	40	120
160	150	10	161 111 097	1.488	63	40	120
225	200	10	161 111 116	1.587	50	40	120
225	200	10	161 111 117	1.756	63	40	120

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>