


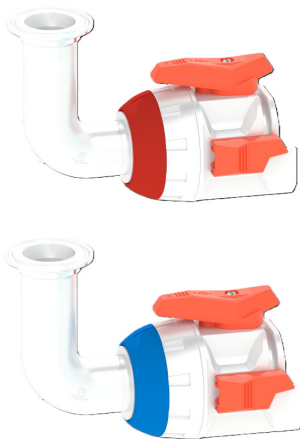

Quick Connect Valve 700 (QC7) Swiveled end-connection: 90° Elbow with sanitary clamp 1"

Model:


- Dual interlock lever mechanism
- 360° swiveled end-connections
- Color coding: Blue for supply // Red for return
- Fluid loss: Approx 5,5cc.
- Valve body: PVDF
- Lever: PP-GF30
- Ball seat: PTFE
- O-Rings: EPDM
- Face seal: EPDM
- Protection cap

Note:

Standards: EN ISO 9393

Option:

- Further connections on request.

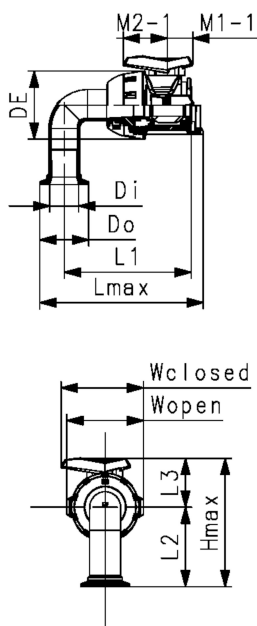

DN	Size	Di	Do	DE	PN	kv-value	Cv 100
(mm)	(inch)	(mm)	(mm)	(mm)	(bar)	($\Delta p=1$ bar)	(gal./min)
						(l/min)	

90° Elbow + sanitary clamp 1" - Blue	25	1	30.0	50.5	70	10	570	39
90° Elbow + sanitary clamp 1" - Red	25	1	30.0	50.5	70	10	570	39

DN	EPDM	SP	Weight
(mm)	Code		(kg)
90° Elbow + sanitary clamp 1" - Blue	735 911 725	1	0.500
90° Elbow + sanitary clamp 1" - Red	735 911 727	1	0.500

	DN	L1	L2	L3	M1-1	M2-1	Lmax	Hmax	Wopen	Wclosed
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		
90° Elbow + sanitary clamp 1" - Blue	25	131.0	82	50	26.5	46	169.0	132.0	79.5	85.5
90° Elbow + sanitary clamp 1" - Red	25	131.0	82	50	26.5	46	169.0	132.0	79.5	85.5

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>