

L = length / Länge

## ELGEF Plus Spigot saddle PE100 d63-400mm / SDR11 / With integrated cutter


- 10 bar Gas / 16 bar Water
  - Complete with lower part
  - 4 mm pin connectors
  - Limited path fusion indicators
  - d355-400mm. Not suitable for pipes if wall thickness is larger than SDR17 pipes.
- \* Topload: delivery without lower part for assembling as Top Load with tool no. 799.350.477; angle adaptor (799.350.340) for fusion cable required

|   | d         | d1   | DN        | PN    | SDR | Code               | Weight |
|---|-----------|------|-----------|-------|-----|--------------------|--------|
|   | (mm)      | (mm) | (mm)      | (bar) |     |                    | (kg)   |
|   | 63        | 32   | 50        | 16    | 11  | <b>193 131 234</b> | 0.469  |
|   | 63        | 63   | 50        | 16    | 11  | <b>193 131 237</b> | 1.036  |
|   | 75        | 32   | 65        | 16    | 11  | <b>193 131 244</b> | 0.618  |
|   | 75        | 63   | 65        | 16    | 11  | <b>193 131 247</b> | 1.166  |
|   | 90        | 32   | 80        | 16    | 11  | <b>193 131 254</b> | 0.543  |
|   | 90        | 63   | 80        | 16    | 11  | <b>193 131 257</b> | 1.128  |
|   | 110       | 32   | 100       | 16    | 11  | <b>193 131 264</b> | 0.607  |
|   | 110       | 63   | 100       | 16    | 11  | <b>193 131 267</b> | 1.195  |
|   | 125       | 32   | 100       | 16    | 11  | <b>193 131 274</b> | 0.659  |
|   | 125       | 63   | 100       | 16    | 11  | <b>193 131 277</b> | 1.224  |
|   | 140       | 32   | 125       | 16    | 11  | <b>193 131 284</b> | 0.679  |
|   | 140       | 63   | 125       | 16    | 11  | <b>193 131 287</b> | 1.224  |
|   | 160       | 32   | 150       | 16    | 11  | <b>193 131 294</b> | 0.652  |
|   | 160       | 63   | 150       | 16    | 11  | <b>193 131 297</b> | 0.850  |
|   | 180       | 32   | 150       | 16    | 11  | <b>193 131 304</b> | 0.777  |
|   | 180       | 63   | 150       | 16    | 11  | <b>193 131 307</b> | 1.316  |
|   | 200       | 32   | 200       | 16    | 11  | <b>193 131 314</b> | 0.854  |
|   | 200       | 63   | 200       | 16    | 11  | <b>193 131 317</b> | 1.352  |
|   | 225       | 32   | 200       | 16    | 11  | <b>193 131 324</b> | 0.856  |
|   | 225       | 63   | 200       | 16    | 11  | <b>193 131 327</b> | 1.324  |
|   | 250       | 32   | 250       | 16    | 11  | <b>193 131 334</b> | 0.787  |
|   | 250       | 63   | 250       | 16    | 11  | <b>193 131 337</b> | 1.348  |
| * | 280       | 63   | 250       | 16    | 11  | <b>193 131 347</b> | 0.830  |
| * | 315 - 355 | 63   | 300 - 350 | 16    | 11  | <b>193 131 357</b> | 1.094  |
| * | 400       | 63   | 400       | 16    | 11  | <b>193 131 377</b> | 0.830  |

| d    | d1   | d2   | H    | H1   | L    | SW   | SDR pipe |
|------|------|------|------|------|------|------|----------|
| (mm) | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) |          |
| 63   | 32   | 19   | 145  | 50   | 165  | 13   | 9 - 11   |
| 63   | 63   | 32   | 152  | 50   | 165  | 17   | 9 - 11   |
| 75   | 32   | 19   | 151  | 50   | 165  | 13   | 9 - 11   |
| 75   | 63   | 32   | 158  | 50   | 165  | 17   | 9 - 11   |
| 90   | 32   | 19   | 158  | 50   | 165  | 13   | 9 - 11   |
| 90   | 63   | 32   | 165  | 50   | 165  | 17   | 9 - 11   |
| 110  | 32   | 19   | 168  | 50   | 182  | 13   | 9 - 17.6 |
| 110  | 63   | 32   | 175  | 50   | 182  | 17   | 9 - 17.6 |
| 125  | 32   | 19   | 176  | 50   | 165  | 13   | 9 - 17.6 |
| 125  | 63   | 32   | 183  | 50   | 165  | 17   | 9 - 17.6 |
| 140  | 32   | 19   | 183  | 50   | 165  | 13   | 9 - 17.6 |
| 140  | 63   | 32   | 190  | 50   | 165  | 17   | 9 - 17.6 |
| 160  | 32   | 19   | 193  | 50   | 182  | 13   | 9 - 17.6 |
| 160  | 63   | 32   | 200  | 50   | 182  | 17   | 9 - 17.6 |
| 180  | 32   | 19   | 203  | 50   | 165  | 13   | 9 - 26   |
| 180  | 63   | 32   | 210  | 50   | 165  | 17   | 9 - 26   |
| 200  | 32   | 19   | 213  | 50   | 165  | 13   | 9 - 26   |
| 200  | 63   | 32   | 220  | 50   | 165  | 17   | 9 - 26   |
| 225  | 32   | 19   | 226  | 50   | 165  | 13   | 11 - 26  |
| 225  | 63   | 32   | 233  | 50   | 165  | 17   | 11 - 26  |
| 250  | 32   | 19   | 238  | 50   | 165  | 13   | 11 - 26  |

# Data sheet

valid from: 9/29/21

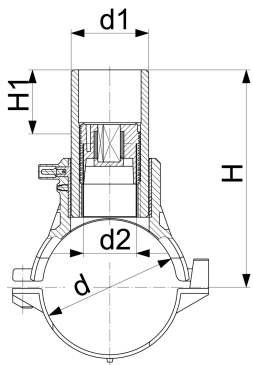

L = length / Länge

|   | d         | d1   | d2   | H    | H1   | L    | SW   | SDR pipe |
|---|-----------|------|------|------|------|------|------|----------|
|   | (mm)      | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) |          |
|   | 250       | 63   | 32   | 245  | 50   | 165  | 17   | 11 - 26  |
| * | 280       | 63   | 35   | 260  | 50   | 165  | 17   | 11 - 26  |
| * | 315 - 355 | 63   | 35   | 298  | 50   | 165  | 17   | 17 - 33  |
| * | 400       | 63   | 35   | 320  | 50   | 165  | 17   | 17 - 33  |

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: [info.ps@georgfischer.com](mailto:info.ps@georgfischer.com)

Internet: <http://www.gfps.com>